

KNÜRR ERGOCON®

11 to 36



THE ULTIMATE 24/7 CONSOLE FOR CRITICAL OPERATIONS

The new **Knürr Ergocon®** console sets the standard for the most demanding 24-hour deployments in various types of control rooms and control suites:

- Best possible ergonomics, using multidimensional setting options on three axes (table height, monitor height, and viewing distance).
- Solutions for individual areas of application and perfect device integration from a wide variety of console models.

- In combination with Knürr Ergocontrol, each user can have customized settings. This free seating concept guarantees efficient workstation ergonomics.

With many years of experience in equipping mission-critical control centers, our Vertiv workstation experts design perfectly adapted workstations for emergency service organizations such as fire departments, rescue services, disaster and civil protection, police, as well as for private security centers.

Knürr Ergocon®

with new KVM-ready technology cabinet

Intelligent cable routing

Cables are routed in a roomy and hidden vertical support on the side of the table, accessible from both inside and out.

High-quality desk tops

- Available in rectangular and curved designs
- Single-level or bi-level work surface.
- Framed by ergonomic and heavy-duty Knürr ErgoSoft edging.



Modular console system

Choice between four different base frame widths

- 1400 mm
- 1800 mm
- 2200 mm
- 2x1400 mm for extra-large consoles

Standard compliance

- DIN EN ISO 11064: Ergonomic design of control centers
- DIN EN 527 defines workstation types with minimum requirements for range of settings:
Type A: min. 650 to 1,250 mm
Type D: min. 680 to 1,180 mm
We fulfill both requirements!*

Stability and design

Stable c-base frame for maximum legroom.
Optional colored decorative strips made of extruded aluminum for a personal touch.


* Depending on the corresponding console design

Modern colors

Base frame in RAL 9006 White aluminium. Tabletop, decorative strips, and wood trim on technology cabinet available in six different designs.

Secure monitor connection

Highest flexibility using single-level and two-level monitor rails, with the option of motorized height and depth adjustment.

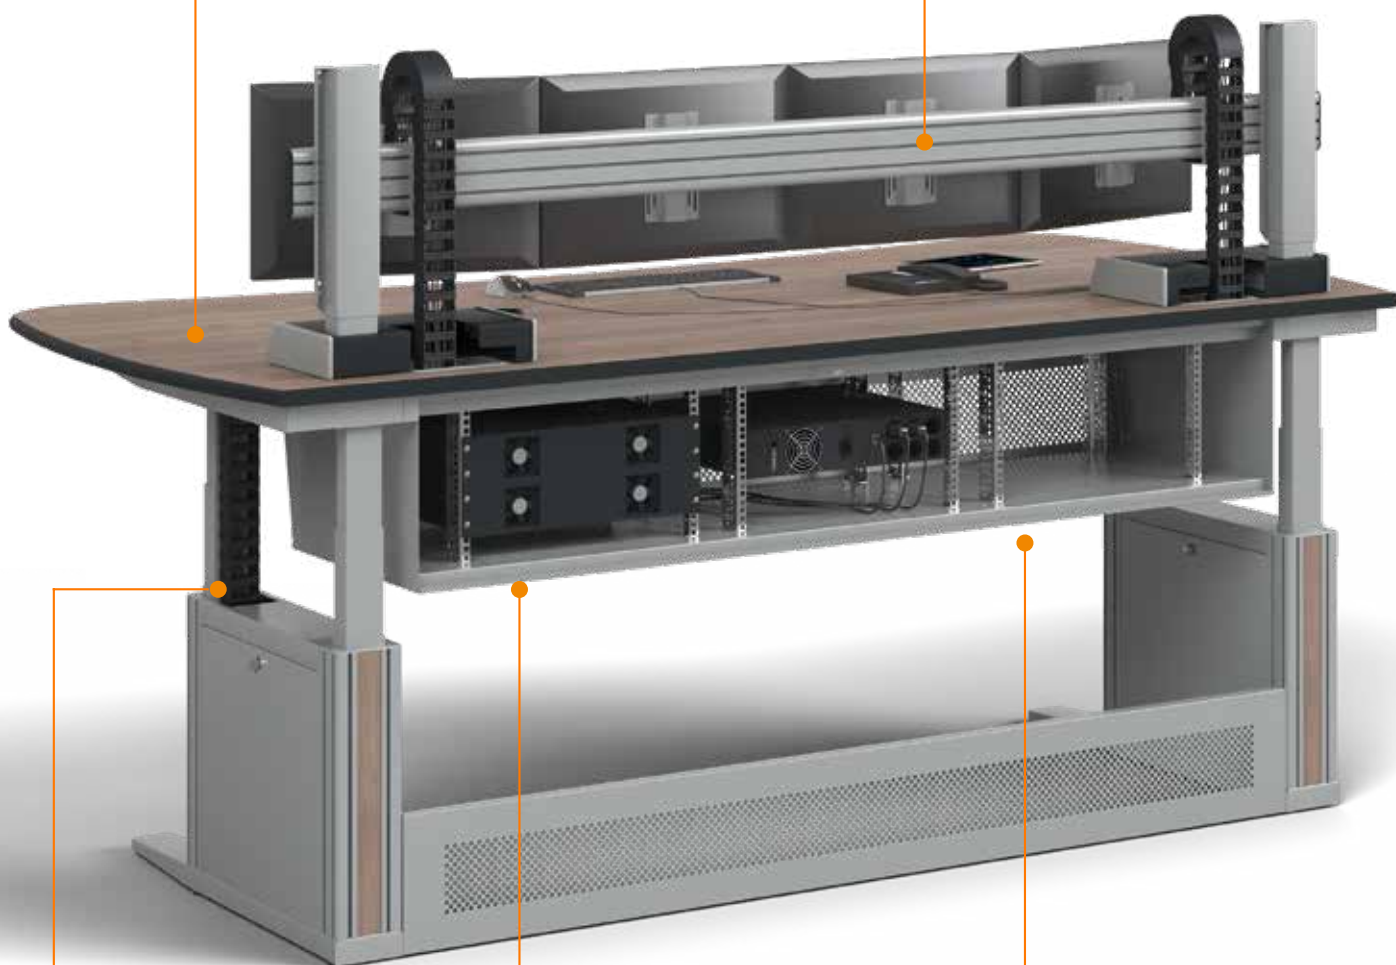

Comfortable height adjustment

Simple height adjustment for working and monitor levels, with memory function (standard).

Integrated passive ventilation concept

Guarantees maximum reliability of IT components.

KVM-ready technology cabinet

With up to 3x6 RU 19" installation space for the perfect integration of KVM switches, SFF-PC, power distribution, cable management accessories, and much more.

Knürr Ergocon®

The right console for your specific application!

To keep up with the growing requirements for control center consoles, we have developed the new Knürr Ergocon console in three different designs:

The common element is the new multifunctional side compartment.

Clever side compartment with multiple features:

Collision protection


using integrated piezoelectric sensors.

Secure cable routing

for optimal bending.

Various installation options

Integration of data and power transfer points using the corresponding Knürr accessories.

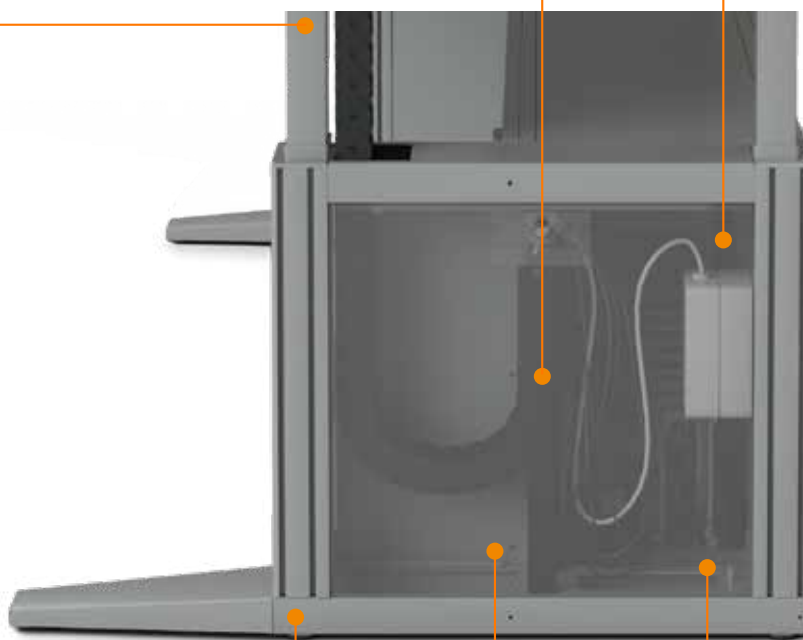

Complete grounding concept

Maximum accessibility

for maintenance purposes, with removable side covers (optionally lockable).

Concealed cables

through raised floor and spacious openings.

1 Installation module

Area of application:
Technical integration with
max. 3x1 RU 19" installation space
under the tabletop, typical for video
extender applications.



2 KVM-ready technology cabinet

Area of application:
Up to 3x6 RU for integrating
technology, typical for KVM
applications, SFF or micro-
workstations.




3 Workstation technology cabinet in base

Area of application:
Maximum technical integration for
tower or 19" workstation requiring
much space, typical for powerful
servers and rack-mounted equipment
directly on the console.



Rectangular consoles:

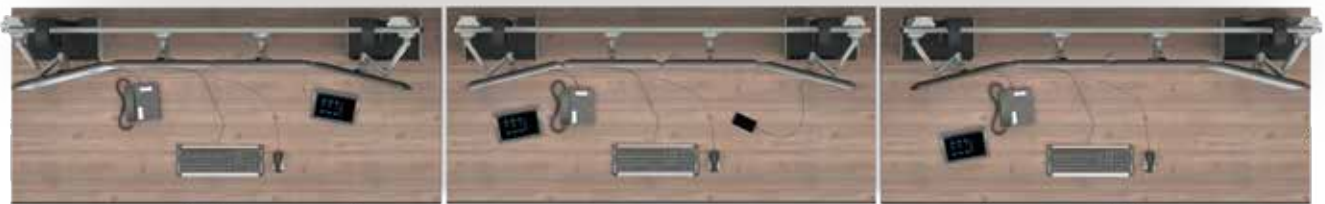

Application:

Especially suited for efficient setups in rows in front of large-format screens on a wall.

A single console can also be efficiently placed into the existing infrastructure, saving space due its rectangular shape. Rectangular workstations are especially recommended for changing activities between manual writing work and computer-supported work.


Our rectangular consoles are available not only in a single-level design, but also as a bi-level table, with the rear level able to drop down 70 mm.

To meet your specific requirements, you have a choice between **four different widths**:

- **1600 mm**
(base width 1400 mm)
- **2000 mm**
(base width 1800 mm)
- **2400mm**
(base width 2200mm)
- **3000 mm**
(base width 2x1400 mm)




Single-level work surface

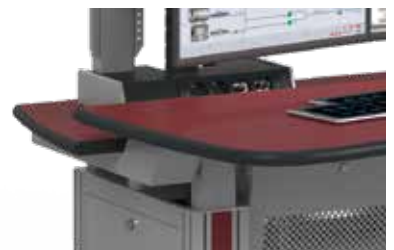


Bi-level work surface

Dimensions:

Single-level work surface:

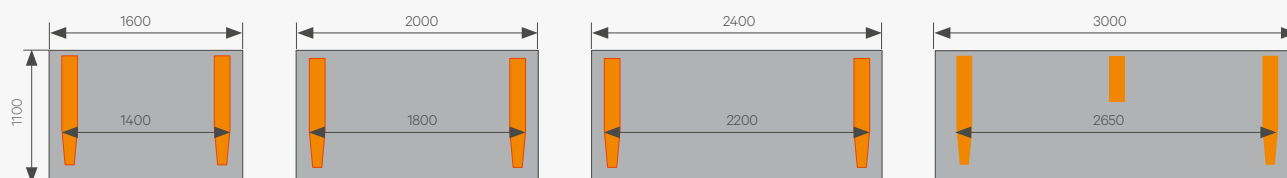

Bi-level work surface:

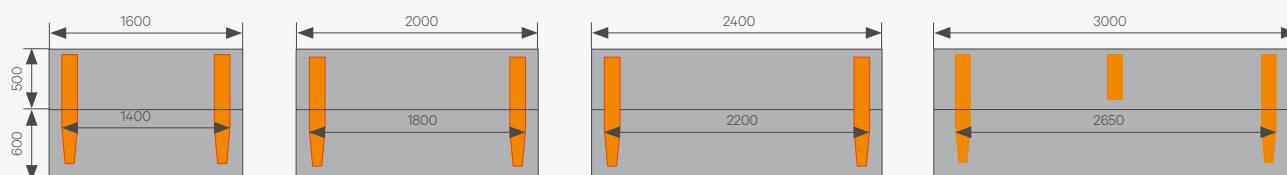

Curved consoles:



Convex arrangement,
large radius



Convex arrangement,
small radius



Concave arrangement

Application:

Especially suited for circular arrangement of consoles in control rooms.

The innovative curved tabletops offer clear advantages: They can be arranged in various curve shapes, whether tight or open, concave or convex.


For single consoles, the ergonomically rounded tabletops play a significant role in reducing the risk of hitting table corners in heavily trafficked control rooms.

Our curved consoles are also available in a single-level design, as well as a bi-level table, with the rear level capable of lowering 70mm. To meet your specific requirements, you have a choice between **four different widths**:


- **1800 mm**
(base width 1400 mm)
- **2200mm**
(base width 1800mm)
- **2600mm**
(base width 2200mm)
- **3100 mm**
(base width 2x1400 mm)

Dimensions:

Single-level work surface:

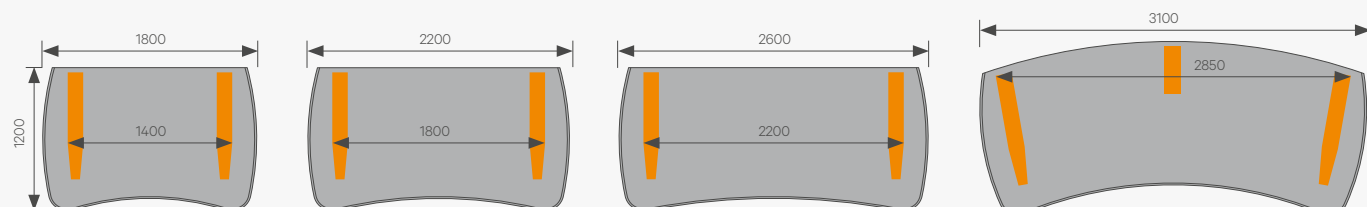

Bi-level work surface:

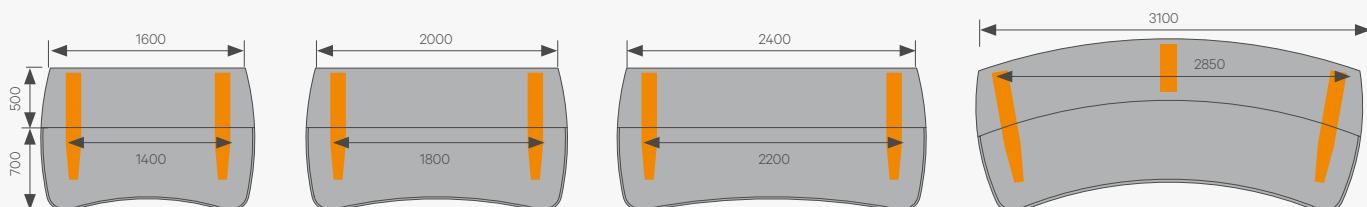

Monitor levels:

The monitor level is the main element found above the working surface. To offer the user optimal ergonomics,

Knürr has three different designs for monitor placement:

1. Heightfix (H-Fix)



Hfix single-level



Hfix two-level

2. Height-adjustable (H-A)



H-A single-level



H-A two-level

3. Height/depth-adjustable (H/D-A)



H/D-A single-level



H/D-A two-level

1. Heightfix (H-Fix):

The horizontal function rail with integrated cable duct guarantees secure and stable monitor mounting. This allows the tabletop below the monitor to remain free for other devices or desk attachments. Large-volume energy chains provide for protected and orderly cable routing.

The patented multi-function unit establishes the basic framework for any monitor mount. It incorporates functions such as concealed

cable routing and mounting for the vertical columns (as well as the optional Knürr-DICON personal docking units).


2. Height-adjustable (H-A):

Above and beyond the functions of the H-Fix monitor level, the H-A version offers infinitely variable electrical height adjustment for monitors. Secure operation is always certain with the integrated piezoelectric sensors for collision protection.

3. Height- and depth-adjustable (H/D-A):

In addition to the functions of the H-Fix and H-A monitor levels, this version is equipped with completely concealed, electrical depth adjustment. This allows the user to adjust all levels as they see fit for the best possible ergonomics and the optimal viewing distance to the monitors.

Knürr multi-function unit:

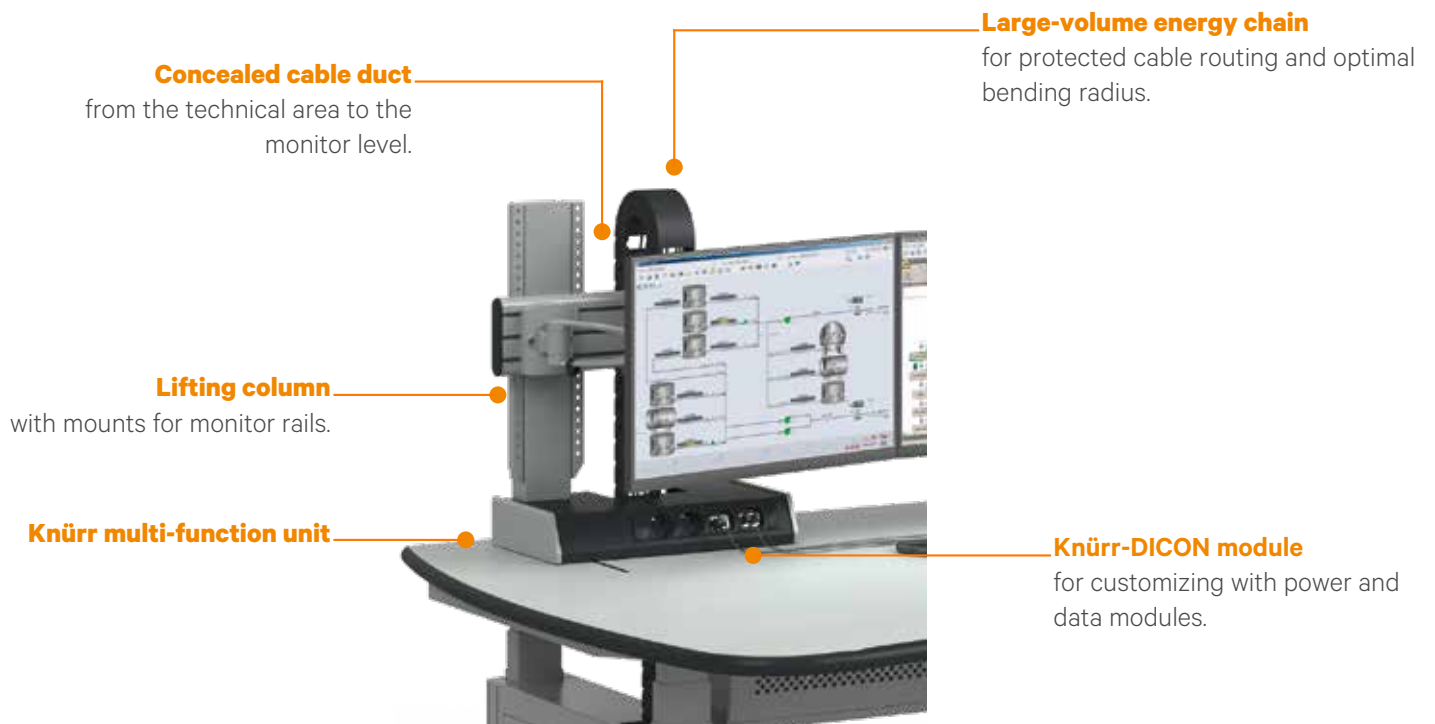

Colors:



- Tabletop in **RAL7035, Light grey**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium

.A



- Tabletop in **Nelson oak wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Nelson oak wood pattern**

.B



- Tabletop in **Pine black wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Pine black wood pattern**

.C



- Tabletop in **Nano bronzo doha**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium

.D



- Tabletop in **Beech wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Beech wood pattern**

.E



- Tabletop in **Maple wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

Depending on design:

- Installation module or KVM technology cabinet in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Maple wood pattern**

.F

Decorative panels:



RAL7021,
Black grey



Nelson oak
wood pattern



Pine black
wood pattern



Nano bronzo
doha



Beech wood
pattern



Maple wood
pattern



Individual
corporate
logo



Knürr Ergocon®

Configurator



The possibilities are impressive!

Over 2,000 variations are available, using the configurable part numbers.

This lets you put together the perfect console, designed specifically to meet your tastes and requirements.

You can include an installation module, KVM-ready technology cabinet in the base, rectangular or curved tabletop, single-level or bi-level design, and up to two-level monitor rails with depth adjustment.

You will always find the right Knürr console for your particular application!

Using the **Knürr Ergocon® configuration table**, you can specify the console that is best for you.

Part no.:

04.500.



| Base widths | Tabletop shape | Monitor level | Color |
|--|----------------------------------|-------------------------------|-----------------------------|
| A = B1400 Installation module | 0 = Rectangular | 0 = without | A = RAL 7035 |
| B = B1400 KVM-ready technology cabinet | 1 = Rectangular, bi-level | 1 = H-Fix single-level | B = Nelson oak |
| C = B1400 Workstation technology cabinet in base | 2 = Curved | 2 = H-Fix two-level | C = Pine black |
| D = B1800 Installation module | 3 = Curved, bi-level | 3 = H-A single-level | D = Nano bronzo doha |
| E = B1800 KVM-ready technology cabinet | | 4 = H-A two-level | E = Beech |
| F = B1800 Workstation technology cabinet in base | | 5 = H/D-A single-level | F = Maple |
| G = B2200 Installation module | | 6 = H/D-A two-level | |
| H = B2200 KVM-ready technology cabinet | | | |
| I = B2200 Workstation technology cabinet in base | | | |
| J = 2x B1400 Installation module | | | |
| K = 2x B1400 KVM-ready technology cabinet | | | |
| L = 2x B1400 Workstation technology cabinet in base | | | |

Sample configuration (see image, left):

Base width: B2200 mm workstation technology cabinet in base
 Tabletop: curved, single-level
 Monitor level: height/depth-adjustable, single-level
 Tabletop color: RAL7035, Light grey



| Base widths | Tabletop shape | Monitor level | Color |
|-------------|----------------|---------------|----------|
| I | 2 | 5 | A |



Configuration number:


04.500.I25.A

Knürr Ergocontrol

Intelligent control for workstations in control rooms!



Advantages

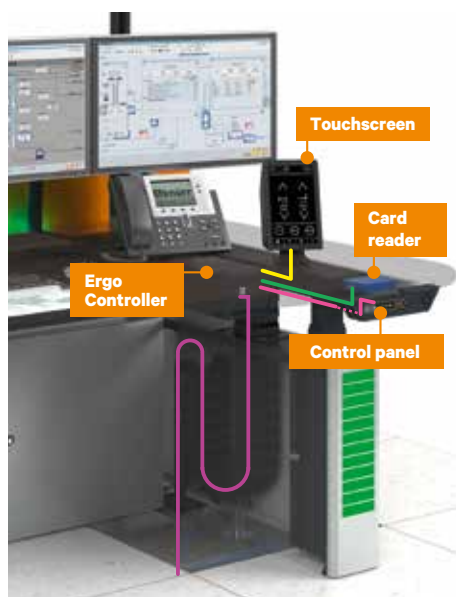


Ergonomics as a factor in productivity and wellbeing – easy to handle and comfortable to use.

Up to 1,000 different users can log in to the console via RFID and store their own personal settings for seated position, standing position, and monitor distance using the Knürr Ergocontrol system. Stored settings can be called up at any console networked to a user group, which means up to 48 different consoles are ready to be automatically adjusted to any user in that group.

- Smart **multi-user** control
- Improves the actual use of the setting options
- **Free choice of seats** in large control rooms
- **User-specific storage of settings**
- Future-proof **using open interfaces**


Main features



Up to three presets




Omnocard Reader




Up to 48 consoles
per group




Upgradable



Single workstation
or network



Open interfaces for
building technology



Parallel tried-and-tested
standard controller



Accessories

Flat display mount, decorative panels, and integrated technology




Flat display mount


- Flat display mount for displays with VESA mount, 100 mm
 - With integrated cable duct
 - For mounting on Knürr IM function rail
 - Integrated quick-mount system
- **Material / Surface Type D-G**
 - Swivel arms: Die-cast aluminum, powdered RAL 9006 White aluminium
 - Adapter: Sheet steel powdered smooth, RAL9006 White aluminium
 - Covers on monitor arms: Plastic, clear
 - **Supply schedule**
 - 1x flat display mount
 - with height compensation plate
 - Fasteners
 - **How supplied**
 - In sets




| Version | Height compensation plate | Load capacity | Order-no. | UP |
|---------------------------------|---------------------------|---------------|--------------|--------|
| Type IM short (130 mm) | • | 15 kg | 04.501.010.7 | 1 unit |
| Type IM medium (130+150 mm) | • | 15 kg | 04.501.011.7 | 1 unit |
| Type IM long (130+200 mm) | • | 15 kg | 04.501.012.7 | 1 unit |
| Type IM double (130+200+150 mm) | • | 15 kg | 04.501.013.7 | 1 unit |




Flat display mount IM short



Flat display mount IM medium



Flat display mount IM long



Flat display mount IM double

Decorative panels

- For customized design of Ergocon aluminum profiles

- Supply schedule**
 - 1 decorative panel

| Version | Order-no. | UP |
|-------------------------|--------------|--------|
| RAL7035, Light grey | 04.501.004.A | 1 unit |
| Nelson oak wood pattern | 04.501.004.B | 1 unit |
| Pine black wood pattern | 04.501.004.C | 1 unit |
| Nano bronzo doha | 04.501.004.D | 1 unit |
| Beech wood pattern | 04.501.004.E | 1 unit |
| Maple wood pattern | 04.501.004.F | 1 unit |
| RAL7021, Black grey | 04.501.004.G | 1 unit |



RAL7035, Light grey



Nelson oak wood pattern



Pine black wood pattern



Nano bronzo doha



Beech wood pattern



Maple wood pattern



RAL7021, Black grey



Individual corporate logo

Dimensions in mm: W = width
H = height
D = depth
h = installation height
t = usable depth
L = length

RU = Number of standard height units. 1 RU = 44.45 mm
19" = 482.6 mm, (suited to 19" installation acc. to DIN 41494)
UP = Unit of packaging
kg = weight

Conversion: 1 inch = 25.4 mm
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

Knürr-Dicon for multi-function unit

- Suitable for integration in the Ergocon multi-function unit
- Customizable power and data supply unit
- Available in three country versions (DE-Germany, F-France, CH-Switzerland) with two or three power outlets (for CH: one or two)
- Flexible equipping of data module elements using keystone mounts
- **Material/surface**
 - Housing: closed sheet steel profile, galvanized, powder-coated structure
 - Plastic parts: Vampamid 6 0024 VO (UL94), recyclable
 - Center core: continuous power rails, brass
- **Approvals/certificates**
 - CE label in accordance with:
 - Low-voltage guideline 2014/35/EU
 - EMC guideline 2014/30/EU
 - RoHS guideline 2011/65/EU
 - Bureau Veritas BG certificate (factory inspection)
 - Bureau Veritas CB certificate
- **Colors**
 - Housing: RAL 9005 Jet black microstructure
 - Plastic parts: black
- **Load capacity**
 - 100–240 V AC/16 A (Schuko and France)
 - 100–240 V AC/10 A (Switzerland)
- **Supply schedule**
 - 1 power outlet strip
 - 2 fastening brackets

| Model | Input values | | Input plug | Outputs | | | | Part No. |
|-------|--------------|---------|------------|--------------|----------|---------------|--------------|--------------|
| | Voltage | Current | | DE Schuko | F UTE | CH Type 13 | Data modules | |
| 4x | 230 V | 16 A | GST-18 | 2 | | | 2 | 03.300.022.8 |
| 4x | 230 V | 16 A | GST-18 | | 2 | | 2 | 03.400.022.8 |
| 4x | 230 V | 16 A | GST-18 | | | 1 | 2 | 03.701.012.8 |
| 4x | 230 V | 16 A | GST-18 | | | 2 | 1 | 03.701.021.8 |



4x unit Schuko



4x unit French (UTE)



4x unit Switzerland (Type 13) with 10 A fuse

Knürr-Dicon mounting plates and Keystone modules

| | |
|---|--------------|
| Mounting plate simple | 03.322.054.8 |
| Mounting plate 1x Keystone | 03.322.055.8 |
| Mounting plate 2x Keystone | 03.322.056.8 |
| Mounting plate 1x VGA | 03.322.057.8 |
| Keystone module USB 3.0 | 03.322.058.1 |
| Keystone module RJ45 Cat.6A | 03.322.059.1 |
| Keystone module HDMI | 03.322.060.1 |
| Keystone module AUDIO 3.5 mm 4-pin stereo | 03.322.061.1 |
| Keystone module VGA | 03.322.062.1 |

Version: Socket – socket for all modules

| | USB 3.0 | RJ 45 | HDMI | Audio | VGA |
|----------------------------|---------|-------|------|-------|-----|
| Mounting plate 1x Keystone | 1x | 1x | 1x | 1x | - |
| Mounting plate 2x Keystone | 2x | 2x | 2x | 2x | - |
| Mounting plate 1x VGA | - | - | - | - | 1x |



Mounting plate simple



Mounting plate 1x Keystone



Mounting plate 2x Keystone



Mounting plate 1x VGA

Supply cable for Knürr-DICON unit

- Network plug CEE/VII - GST 18 socket (Wieland)
- Line H05VV-F3G 1.5 mm2
- Color
 - White
- Note
 - Please find further Knürr Dicon versions for worktop integration on page 264.

| L | Order-no. | UP |
|-------|--------------|--------|
| 2.0 m | 04.000.040.0 | 1 unit |
| 5.0 m | 04.000.041.0 | 1 unit |



DOS00467

Data transfer point RJ45

- Suited for the installation of up to five RJ45 keystone elements.
- For simple attachment in Ergocon side compartment.
- Material/surface
 - Sheet steel, powder-coated RAL9006, White aluminium
- Supply schedule
 - 1x mounting bracket with fasteners
- How supplied
 - In sets
- Note
 - Please order the accompanying Keystone elements separately.

| Version | Order-no. | UP |
|-----------------------------|--------------|--------|
| Data transfer point | 04.501.035.7 | 1 unit |
| Keystone module RJ45 Cat.6A | 03.322.059.1 | 1 unit |



Dimensions in mm: W = width
H = height
D = depth
h = installation height
t = usable depth
L = length

Conversion: 1 inch = 25.4 mm
1 pound = 453.6 g

RU = Number of standard height units, 1 RU = 44.45 mm
19" = 482.6 mm,
(suited to 19" installation acc. to DIN 41494)
UP = Unit of packaging
kg = weight

Replace 'x' with the last digit of your color choice

Support bracket for power distributor

- Suitable for installation of max. 2 Knürr 19" DI strip PDUs or a power distributor box.
- For simple attachment in Ergocon side compartment.
- **Material/surface**
 - Sheet steel, powder-coated RAL9006, White aluminium
- **Supply schedule**
 - 1x support bracket with fasteners
- **How supplied**
 - In sets
- **Note**
 - Please order power distribution units separately.

| Version | Order-no. | UP |
|-----------------|--------------|--------|
| Support bracket | 04.501.036.7 | 1 unit |



Accessories

Suitable for consoles with workstation technology cabinet in base!

19" Mounting-Set 6 RU

- Suitable for consoles with workstation technology cabinet in base
- Space saving installation of 19" equipment like patch panels, switches or socket strips
- Assembly of equipment on 19" profile using hole matrix and cage nuts
- **Material/surface**
 - Sheet steel, powder-coated, RAL9006, White Aluminium
- **Supply schedule**
 - 1x 19" Mounting-Set 6 RU
 - Mounting material
- **How supplied**
 - In sets
- **Note**
 - Please order suitable fastening materials for 19" components separately.

| Version | Order-no. | UP |
|------------------------|--------------|--------|
| 19" Mounting-Set, 6 RU | 04.501.039.7 | 1 unit |



19" swivel frame, 4 RU

- Suitable for consoles with workstation technology cabinet in base
- Attachment for 19" swivel frame on the floor frame of the technology cabinet in the workstation base using depth members
- Assembly of equipment on 19" profile using hole matrix and cage nuts
- **Material/surface**
 - Sheet steel, powder-coated, RAL7021, Black grey
- **Supply schedule**
 - 1x 19" frame
- **How supplied**
 - Pre-mounted
- **Note**
 - Please order suitable fastening materials for 19" components separately.

| Version | Order-no. | UP |
|------------------------|--------------|--------|
| 19" swivel frame, 4 RU | 04.501.040.8 | 1 unit |



Extension Module for workstation technology cabinet

- Suitable for consoles with workstation technology cabinet in base.
- Extension of workstation technology cabinet by 200mm in depth to create space for equipment with larger depth.
- **Material**
 - Sheet steel, powder-coated
- **Surface**
 - RAL9006, White Aluminum
- **Supply schedule**
 - 1 Extension module
 - Mounting material
- **How supplied**
 - In sets

| Version | Order-no. | UP |
|------------------------------|--------------|--------|
| Extension module 200mm W1400 | 04.501.070.7 | 1 unit |
| Extension module 200mm W1800 | 04.501.071.7 | 1 unit |
| Extension module 200mm W2200 | 04.501.072.7 | 1 unit |



Cable bridge

- Suitable for consoles with technology cabinet in workstation base
- **Material**
 - Cable bridge, steel, coated
- **Supply schedule**
 - 1x cable bridge with fasteners
- **How supplied**
 - In sets
- **Dimensions**
 - Height 60 mm, depth 60 mm length fits to technology cabinet in the base


| Version | Order-no. | UP |
|------------------------|--------------|--------|
| For base width 1400 mm | 04.501.030.9 | 1 unit |
| For base width 1800 mm | 04.501.031.9 | 1 unit |
| For base width 2200 mm | 04.501.032.9 | 1 unit |



19" frame, 8 RU

- Suitable for consoles with technology cabinet in workstation base
- 19" frame for attachment of 19" components and mounting plates
- Attachment of 19" frame on the floor frame of the technology cabinet in the workstation base using depth members, thereby adjustable
- Mounting equipment on 19" profile using t-slots and speed nuts, thereby allowing infinite height adjustment
- **Material**
 - 19" adapter plate and frame cover made of sheet steel (powder-coated structure)
 - 19" profile made of extruded aluminum, blank
- **Surface**
 - Adapter plate RAL 9011, Graphite black
- **Supply schedule**
 - 1 adapter plate
 - 1 frame cover
 - 2 depth members
 - 2 19" profiles
- **How supplied**
 - Pre-mounted
- **Dimensions**
 - Please order suitable fastening materials for 19" components with order (see page 132).

| Version | Order-no. | UP |
|-----------------|--------------|--------|
| 19" frame, 8 RU | 04.412.650.7 | 1 unit |



KON20032

Dimensions in mm: W = width
H = height
D = depth
h = installation height
t = usable depth
L = length

RU = Number of standard height units, 1 RU = 44.45 mm
19" = 482.6 mm, (suited to 19" installation acc. to DIN 41494)
UP = Unit of packaging
kg = weight

Conversion: 1 inch = 25.4 mm
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

19" accessories

Suitable for consoles with KVM-ready technology cabinet!





19" shelf, 2 RU
fixed

- For mounting in cabinets with fixed 19" installation, frontal
- Simple and fast mounting on 19" profiles
- Also for swivel frame in 19" cabinet and 19" housing
- **Surface/color**
 - Powder-coated structure
 - RAL 7035 Light grey
- **Material**
 - Sheet steel 1.5 mm
- **Load capacity**
 - 20 kg static
- **Supply schedule**
 - 1 shelf, fixed
 - Mounting material
- **How supplied**
 - In sets

| W | H | W x L | Order-no. | UP |
|-------|------|-----------|------------------|--------|
| 482.6 | 88.1 | 442 x 280 | 01.102.731.1.001 | 1 unit |
| 482.6 | 88.1 | 442 x 380 | 01.102.731.1.002 | 1 unit |



MIR00373



MIR00375

19" cable routing plate, 1 RU

- For orderly cable routing.
- **Material/surface**
 - Type 1: Front plate sheet steel 1.5 mm, powder-coated.
- **Color**
 - RAL 7035 Light grey
- **Outer dimensions**

Cable routing:

 - Type 1: 55 x 22 mm, plastic
- **Supply schedule**
 - 1 19" front plate
 - 5 cable routers
- **How supplied**
 - Pre-mounted
- **Note**
 - When ordering, please also order suitable front plate fasteners

| W | RU | Mount depth | Version | Order-no. | UP |
|-----|----|-------------|---------|--------------|--------|
| 483 | 1 | from 80 mm | Type 1 | 05.040.111.1 | 1 unit |



Cable router ring

- For orderly cable routing
- Dimensions: outer 61 mm x 42.5 mm. Inner 52 mm x 23 mm.
- **Material/surface**
 - Cable holder: PPO, similar to RAL 7035 Light grey.
 - Soft rubber profile: EPDM, similar to RAL 7021 Black grey.
- **Supply schedule**
 - 10 cable routers.
- **How supplied**
 - In sets

| Version | Order-no. | UP |
|------------|--------------|----------|
| Insertable | 05.040.112.9 | 10 units |



Fillister head screw

- IEC DIN 967
- **Supply schedule**
 - 50 fillister head screws, Form Z
- **How supplied**
 - In sets

| W | H | D | Version | Order-no. | UP |
|---|---|---|---------|--------------|-------|
| | | | M5 x 10 | 05.041.330.9 | 1 set |
| | | | M5 x 16 | 05.041.331.9 | 1 set |
| | | | M6 x 10 | 05.041.332.9 | 1 set |
| | | | M6 x 16 | 05.041.333.9 | 1 set |



Cage nuts

- Clips into profiles with hole matrix
- **Supply schedule**
 - 50 cage nuts, sheet metal, 1.5mm
- **How supplied**
 - In sets

| Version | Order-no. | UP |
|-------------------------|--------------|-------|
| M5: sheet metal, 1.5 mm | 05.041.513.7 | 1 set |
| M6: sheet metal, 1.5 mm | 05.041.514.7 | 1 set |



Link-up container and link-up duct

Knürr Ergocon® Link-up container

- Basic body of link-up container with storage compartment H150mm and garage for Ergocon mobile drawer unit
 - Generous technical module with 19" frame in the rear area
 - Removable perforated rear panel (optionally lockable or with push lock)
 - Link-up duct on both sides for lateral connection to the Knürr Ergocon® console for optimised cabling
 - Removable top cover on link-up ducts for best accessibility
 - Free-form table top with high-quality HPL coating and all-round ABS edge banding
- **Material**
 - Link-up container:
 - Basic body: Wooden corpus, coated
 - Tabletop: HPL coated with ABS edging
 - Removable rear panel
 - Sheet steel, powder coated
 - **Surface**
 - Basic body, rear panel and link-up ducts completely in RAL9006, White Aluminum
 - Tabletop .A in RAL7035, Light Grey, ABS edging in black (Different tabletop colors are available to match the console design)
 - **Supply schedule**
 - 1 Link-up container
 - 1 Tabletop
 - 2 Link-up ducts
 - **How supplied**
 - Pre-mounted.
 - **Note**
 - The overall dimensions, the tabletop shape and the tabletop colour vary depending on the project.
 - Please order suitable roller containers or shelves separately.

| Version | Order-no. | UP |
|--|---------------------|--------|
| Link-up container 1 module 20° convex | 04.501.080.A | 1 unit |
| Link-up container 2 modules 20° convex | 04.501.081.A | 1 unit |
| Storage shelf for link-up container | 04.501.085.7 | 1 unit |



Knürr Ergocon® Link-up duct

- Link-up duct for connection of two Knürr Ergocon® consoles.
 - Removable top cover on link-up ducts for best accessibility and optimised cabling
- **Material**
 - Cover panels: Wooden elements, coated
 - Mounting brackets: sheet steel, powder coated
 - **Surface**
 - RAL 9006, White Aluminum
 - **Dimensions**
 - Project specific
 - **Supply schedule**
 - 1 Link-up duct
 - Mounting Material
 - **How supplied**
 - In sets

| Version | Order-no. | UP |
|----------------------------------|---------------------|--------|
| Link-up duct, straight version | 04.501.090.7 | 1 unit |
| Link-up duct, 20° convex version | 04.501.091.7 | 1 unit |

Dimensions in mm: W = width
H = height
D = depth
h = installation height
t = usable depth
L = length

RU = Number of standard height units, 1 RU = 44,45 mm
19" = 482,6 mm,
(suited to 19" installation acc. to DIN 41494)
UP = Unit of packaging
kg = weight

Conversion: 1 inch = 25,4 mm
1 pound = 453,6 g

Replace 'x' with the last digit of your color choice

