

Mobile Equipment Carriers

Knürr Cabinet Cart

Page 37 to 44



Knürr Cabinet Cart - Rollo

Strong points

• Aesthetics

- Clear lines and curved shapes for a compact and modern look
- Rear and Side panels with square hole design perforation provide additional functions, e.g. for ventilation and hook-in accessories
- Space-saving cabling area, aesthetically integrated in rear

• Functionality

- Suitable for the most varied areas of application: PC or printer station, IT-cart, logistics or laboratory as well as workshops or assembly and manufacturing applications
- Space-saving footprint (710 x 870 mm)
- Already implemented cable management

• Features

- Maximum static load rating:
 - Overall load rating of each cabinet cart: 1500 N
 - per Castor: 750N
 - Surface load of worktop: 400 N
 - Distributed load of shelf: 400 N

Material

- All Side panels, shelves, or similar are made from powder coated sheet steel
- Worktop out of high quality multi layer chipboard with HP laminate surfaces, which enable high load ratings and ensure long durability.
- Bumpers (main frame cover) out of special plastics

• Available accessories

- Toolholder
- Flat screen holder
- Handle
- Socket strip (e.g. 6 way+switch)

• Variability

- Numerous individual configurations possible
- All modules can be combined and mounted in the easiest possible way
- Simple and quick adjustment without special tools



MOB20142



MOB20143

Dimensions in mm: W = Width
 H = Height
 D = Depth
 h = Installation height
 d = Useful depth
 L = Length

HU = Standard height unit, 1 HU = 44,45 mm
 19" = 482,6 mm,
 (ideal for 19" components in acc. with DIN 41494)
 UP = Unit of packaging
 kg = Weight

Conversion: 1 inch = 25,4 mm
 Replace „x“ with the number of your color choice

Knürr Cabinet Cart - Rollo



- Knürr Cabinet Cart toolholder can be mounted easily at the rear panel, via square hole design perforation
 - Lockable roller blind door
 - Vibration-free and noiseless transport with special rubber smooth-running castors Ø 125mm (4 casters, 2 lockable)
 - Bumpers, made out of special plastics
 - Cabinet Cart handles (bow shaped) can be mounted on left- and rightside
- **Color**
 - Color combination .9 (as shown in the picture)

- **Supply schedule**
 - 1 basic frame incl. 4 casters
 - 2 vertical extrusions (rear)
 - 2 side panels
 - 1 rear panel
 - 1 top cover
 - 1 shelf
- **How supplied**
 - fully assembled
- **Castors**
 - RAL9011, graphite black

Order no.	UP
00.713.200.9	1 unit



MOB20142

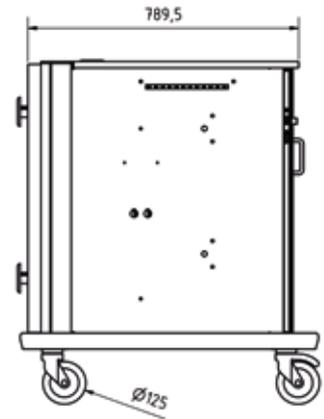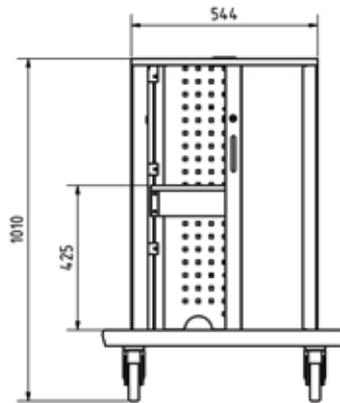

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44,45 mm
19" = 482,6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 inch = 25,4 mm
Replace „x“ with the number of your color choice

ip = assemble to order (shipped within 10 working days)

Caution: In case of larger orders, delivery times may increase.

Hook-On Block For holding test pins

- **Material**
 - Plastic
- **Color**
 - RAL 9011, graphite black
- **Supply schedule**
 - 1 hook-on block
 - Mounting material

W	H	D		Order no.	UP
220	120	55		00.701.090.9	1 unit



MOB20155

Toolholder

- Toolholder / Accessoires
- To hook into square hole perforation of side and rear panels
- Impact and scratch-proof plastic coatings
- Base plate thickness 1,5 mm (embossed)
- Including an original locking screw
- Locking screw:
 - The polyamid locking screw prevents side and rear panels from scratches

Description	Order no.	UP
Toolholder - Double Hook 50 mm	00.713.106.0	1 unit
Machine holder - round shaped 60 mm	00.713.106.1	1 unit
Cableholder 150 mm	00.713.106.2	1 unit
Locking screw - 100 pcs	00.713.106.3	1 unit



MOB20156



MOB20157



MOB20158



MOB20159

Flat screen holder

- Monitor arms for mounting flat screens with the 75 and 100 mm VESA mounting
- **Supply schedule**
 - 1 flat screen support
 - 1 Monitor pole 400 mm
 - Mounting material
- **How supplied**
 - Flat-packed kit
- **Finish / Material**
 - Swivel arm: die-cast aluminium
 - Adapter plates: sheet steel
 - Metal parts: powder-coated, RAL 9006, White aluminum, smooth

H	Order no.	UP
400	P 01.316.229.9	1 unit



MOB20161

Handle

- Handle (bow shaped)
- **Material**
 - Aluminium, welded
- **Color**
 - RAL 9011, graphite black
- **Supply schedule**
 - 1 Handle
 - Mounting material

W	H	D	Order no.	UP
420	25	75	00.713.108.0	1 unit




MOB20161

Socket Strip 6-way incl. Switch

- Socket Strip (Schuko) 6-way incl. switch and mounting material

L	Order no.	UP
483	00.713.110.0	1 unit




DOS20045

Socket Strip 4-way

- Socket Strip (Schuko) 4-way and mounting material

L	Order no.	UP
333	00.713.110.5	1 unit



without switch

DOS20020

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 inch = 25.4 mm
Replace „x“ with the number of your color choice

P = assemble to order (shipped within 10 working days)

Caution: In case of larger orders, delivery times may increase.